

GREGORY AND ADAMS, P.C.

PAUL H. BURNHAM
SUSAN L. GOLDMAN
J. VANCE HANCOCK

J. CASEY HEALY
MICHAEL LAMAGNA*
DERREL M. MASON*

MATTHEW C. MASON*
JAMES D'ALTON MURPHY*
KATHLEEN L. ROYLE *

RALPH E. SLATER
ROGER R. VALKENBURGH *

* ALSO ADMITTED IN NEW YORK
* ALSO ADMITTED IN VERMONT

ATTORNEYS AT LAW
190 OLD RIDGEFIELD ROAD
WILTON, CT 06897

(203) 762-9000
FAX: (203) 834-1628

ESTABLISHED 1964

NEW YORK OFFICE:
399 KNOLLWOOD ROAD - SUITE 201
WHITE PLAINS, NY 10603
(914) 848-5000

WWW.GREGORYANDADAMS.COM

JULIAN A. GREGORY
(1912 - 2002)

THOMAS T. ADAMS
(1929 - 2015)

PLEASE REPLY TO SENDER:
JAMES D'ALTON MURPHY
DIRECT DIAL: 203-571-6309
jmurphy@gregoryandadams.com

August 31, 2021

Via Email and Hand Delivery

Inland Wetlands Commission
Town Hall Annex
238 Danbury Road
Wilton, CT 06897

Attn: Mr. Mike Conklin -- Director of Environmental Affairs

Re: Connecticut Humane Society -- Application for Significant Regulated Activity Permit
(WET#2724)
Premises: 863-875 Danbury Road, Wilton, CT

Dear Mr. Chairman and Members of the Commission:

As attorney for Connecticut Humane Society ("CHS"), this letter sets forth our responses to the comments contained in the Department of Public Works' Memorandum to the Commission dated August 5, 2021, and an email from Ms. Jennifer Zbell, Assistant Sanitarian, to Redniss & Mead ("R&M"), dated August 25, 2021. In support of the response to Comment #2 and Ms. Zbell, we enclose eight (8) copies each of the following:

1. Existing On-Site Drainage Basin Exhibit, prepared by R&M, dated August 16, 2021.
2. Proposed On-Site Drainage Basin Exhibit, prepared by R&M, dated August 16, 2021.
3. Site Grading Plan (SE-2), prepared by R&M dated July 1, 2021 and revised August 24, 2021.
4. Site Utility Plan (SE-3), prepared by R&M, dated July 1, 2021, and revised August 24, 2021.
5. Site Septic Design Plan (SE-5), prepared by R&M, dated July 1, 2021 and revised August 24, 2021.
6. Notes and Details (SE-6) prepared by R&M dated July 1, 2021 and revised August 24, 2021.
7. Details (SE-8) prepared by R&M dated July 1, 2021, and revised August 24, 2021.

DPW Comment #1 The State shall also have the opportunity to review drainage analysis and site plans as it relates to their storm drainage infrastructure and roadway on Route 7.

Response: *CHS acknowledges that the State will have the opportunity to review the drainage analysis and site plans as it relates to their storm drainage infrastructure and roadway on Route 7.*

DPW Comment #2 For record tracking purposes, please provide the following:

Existing pervious surface area, existing impervious surface area directly connected to the water course, proposed pervious surface area, proposed impervious surface area disconnected from the water course, proposed impervious surface area directly connected to the water course.

Response: *CHS submits the attached Existing On-Site Drainage Basin Exhibit and Proposed On-Site Drainage Basin Exhibit prepared by R&M, dated August 16, 2021, in response to this Comment.*

DPW Comment #3 Prior to the issuance of Certificate of Occupancy, the Design Engineer shall provide As-built drawing and certification letter indicating that the project was built in accordance with the design plans.


Response: *CHS acknowledges this future obligation.*

Ms. Zbell August 25, 2021 Comments: The pump chamber needs to be sized on the 24 hour storage for the gallons with the safety factor so the pump chamber needs to be at least 2200 gallons. Septic tank needs to meet 10' from water line. If we could move the septic tank from under the driveway that would be great.

Response: Redniss & Mead has made revisions to the plans as suggested by Ms. Zbell. The revised plans were very recently forwarded to Ms. Zbell for her review and are enclosed herewith. Please note that, as of this writing, we have not received an affirmative response from Ms. Zbell.

Respectfully submitted,
Gregory and Adams, P.C.

By:

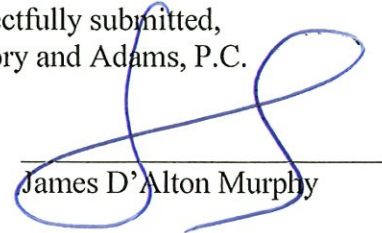
James D'Alton Murphy

JD'AM/ko
Enclosures

cc: Mr. James Bias – Connecticut Humane Society


Mr. Thomas Quarticelli, Mr. Michael Tyre and Ms. Debra Seay – Amenta Emma Architects

Mr. Michael Galante and Mr. Steve Cipolla – Hardesty & Hanover

Mr. Craig Flaherty and Mr. Vincent Hynes – Redniss & Mead

Ms. Kate Throckmorton – Environmental Land Solutions

M:\Clients\Connecticut Humane Society\2021 Applications to Inlands and Planning and Zoning Commissions\Response to DPW
Memo\IWCLtr Response to DPW (6).doc

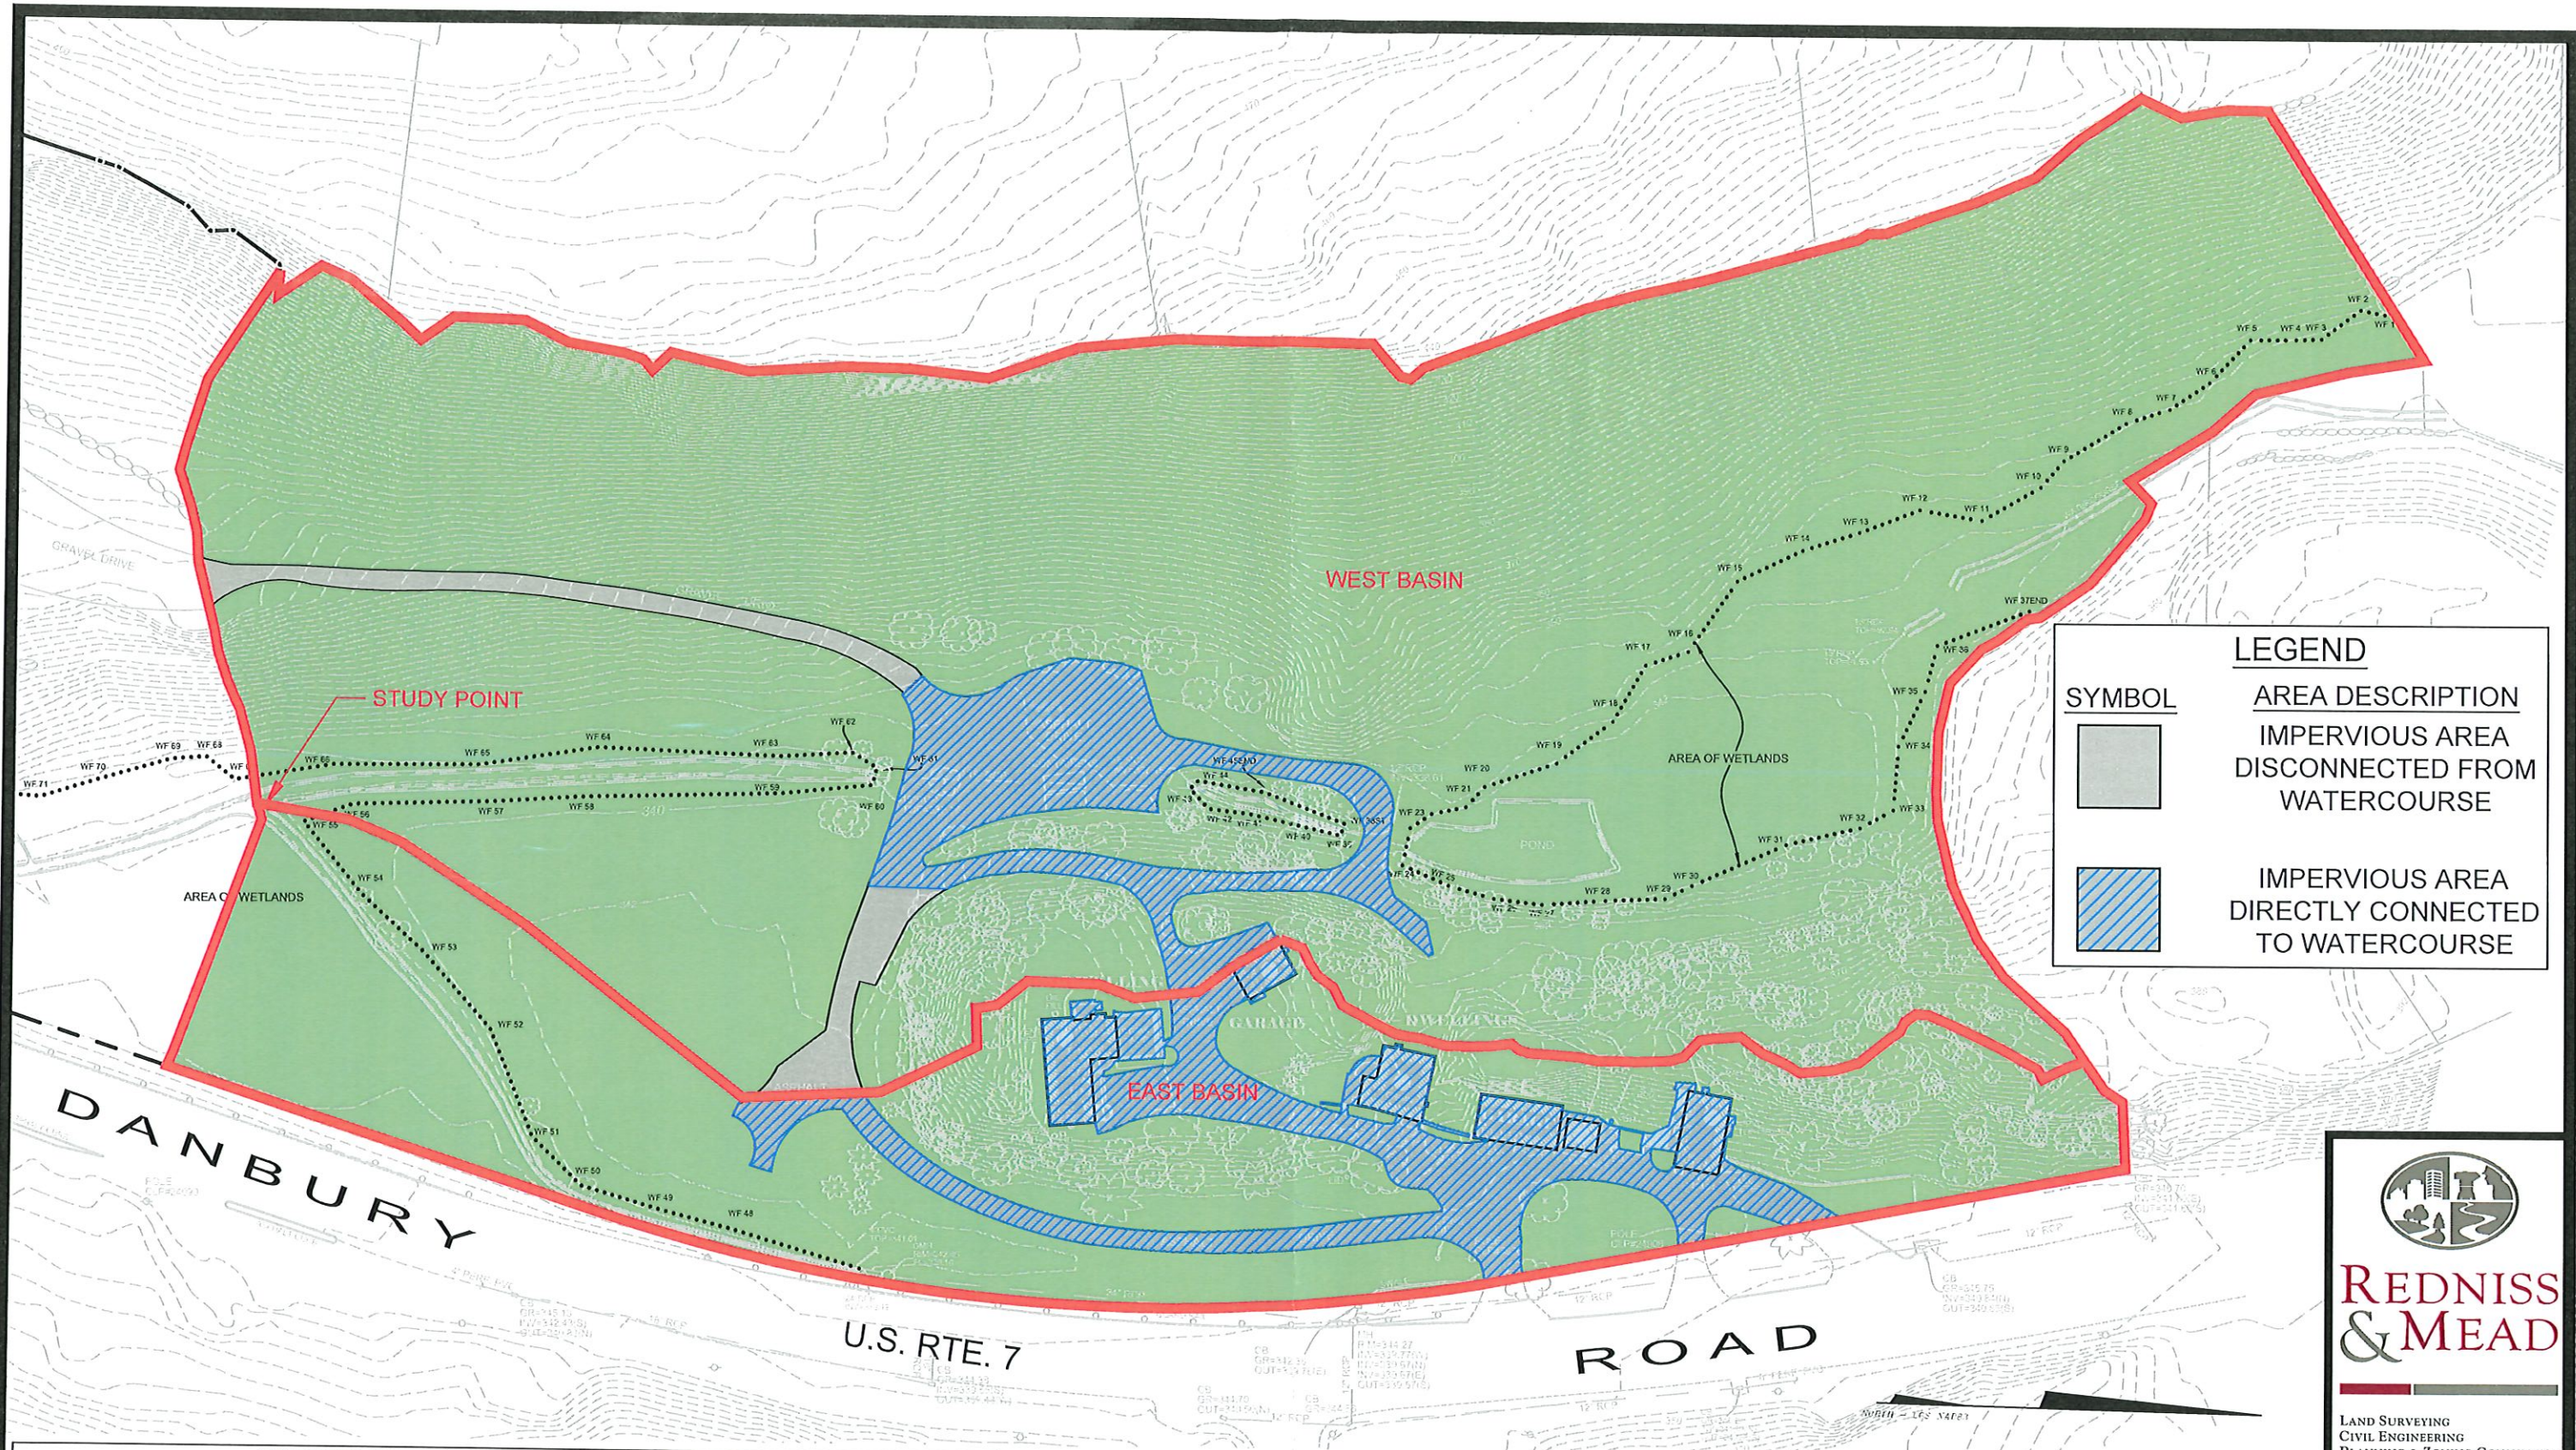

EXISTING ON-SITE DRAINAGE BASIN EXHIBIT				
BASIN	PERVIOUS AREA (ACRES)	IMPERVIOUS DISCONNECTED (ACRES)	IMPERVIOUS DIRECTLY CONNECTED (ACRES)	TOTAL ON-SITE BASIN AREA
EAST	2.056 (89,558 SF)	0	0.501 (21,845 SF)	2.557 (111,403 SF)
WEST	7.047 (306,986 SF)	0.147 (6,408 SF)	0.370 (16,117 SF)	7.564 (329,511 SF)
TOTAL ONSITE	9.103 (396,544 SF)	0.147 (6,408 SF)	0.871 (37,962 SF)	10.121 (440,914 SF)

EXISTING ON-SITE DRAINAGE BASIN EXHIBIT
863 DANBURY ROAD
WILTON, CT




REDNISS & MEAD

LAND SURVEYING
CIVIL ENGINEERING
PLANNING & ZONING CONSULTING
PERMITTING

22 First Street | Stamford, CT 06905
Tel: 203.327.0500 | Fax: 203.357.1118
www.rednissmead.com

COMM. NO.: 10258	DATE: 08/16/2021 SCALE: 1"=80'
---------------------	---

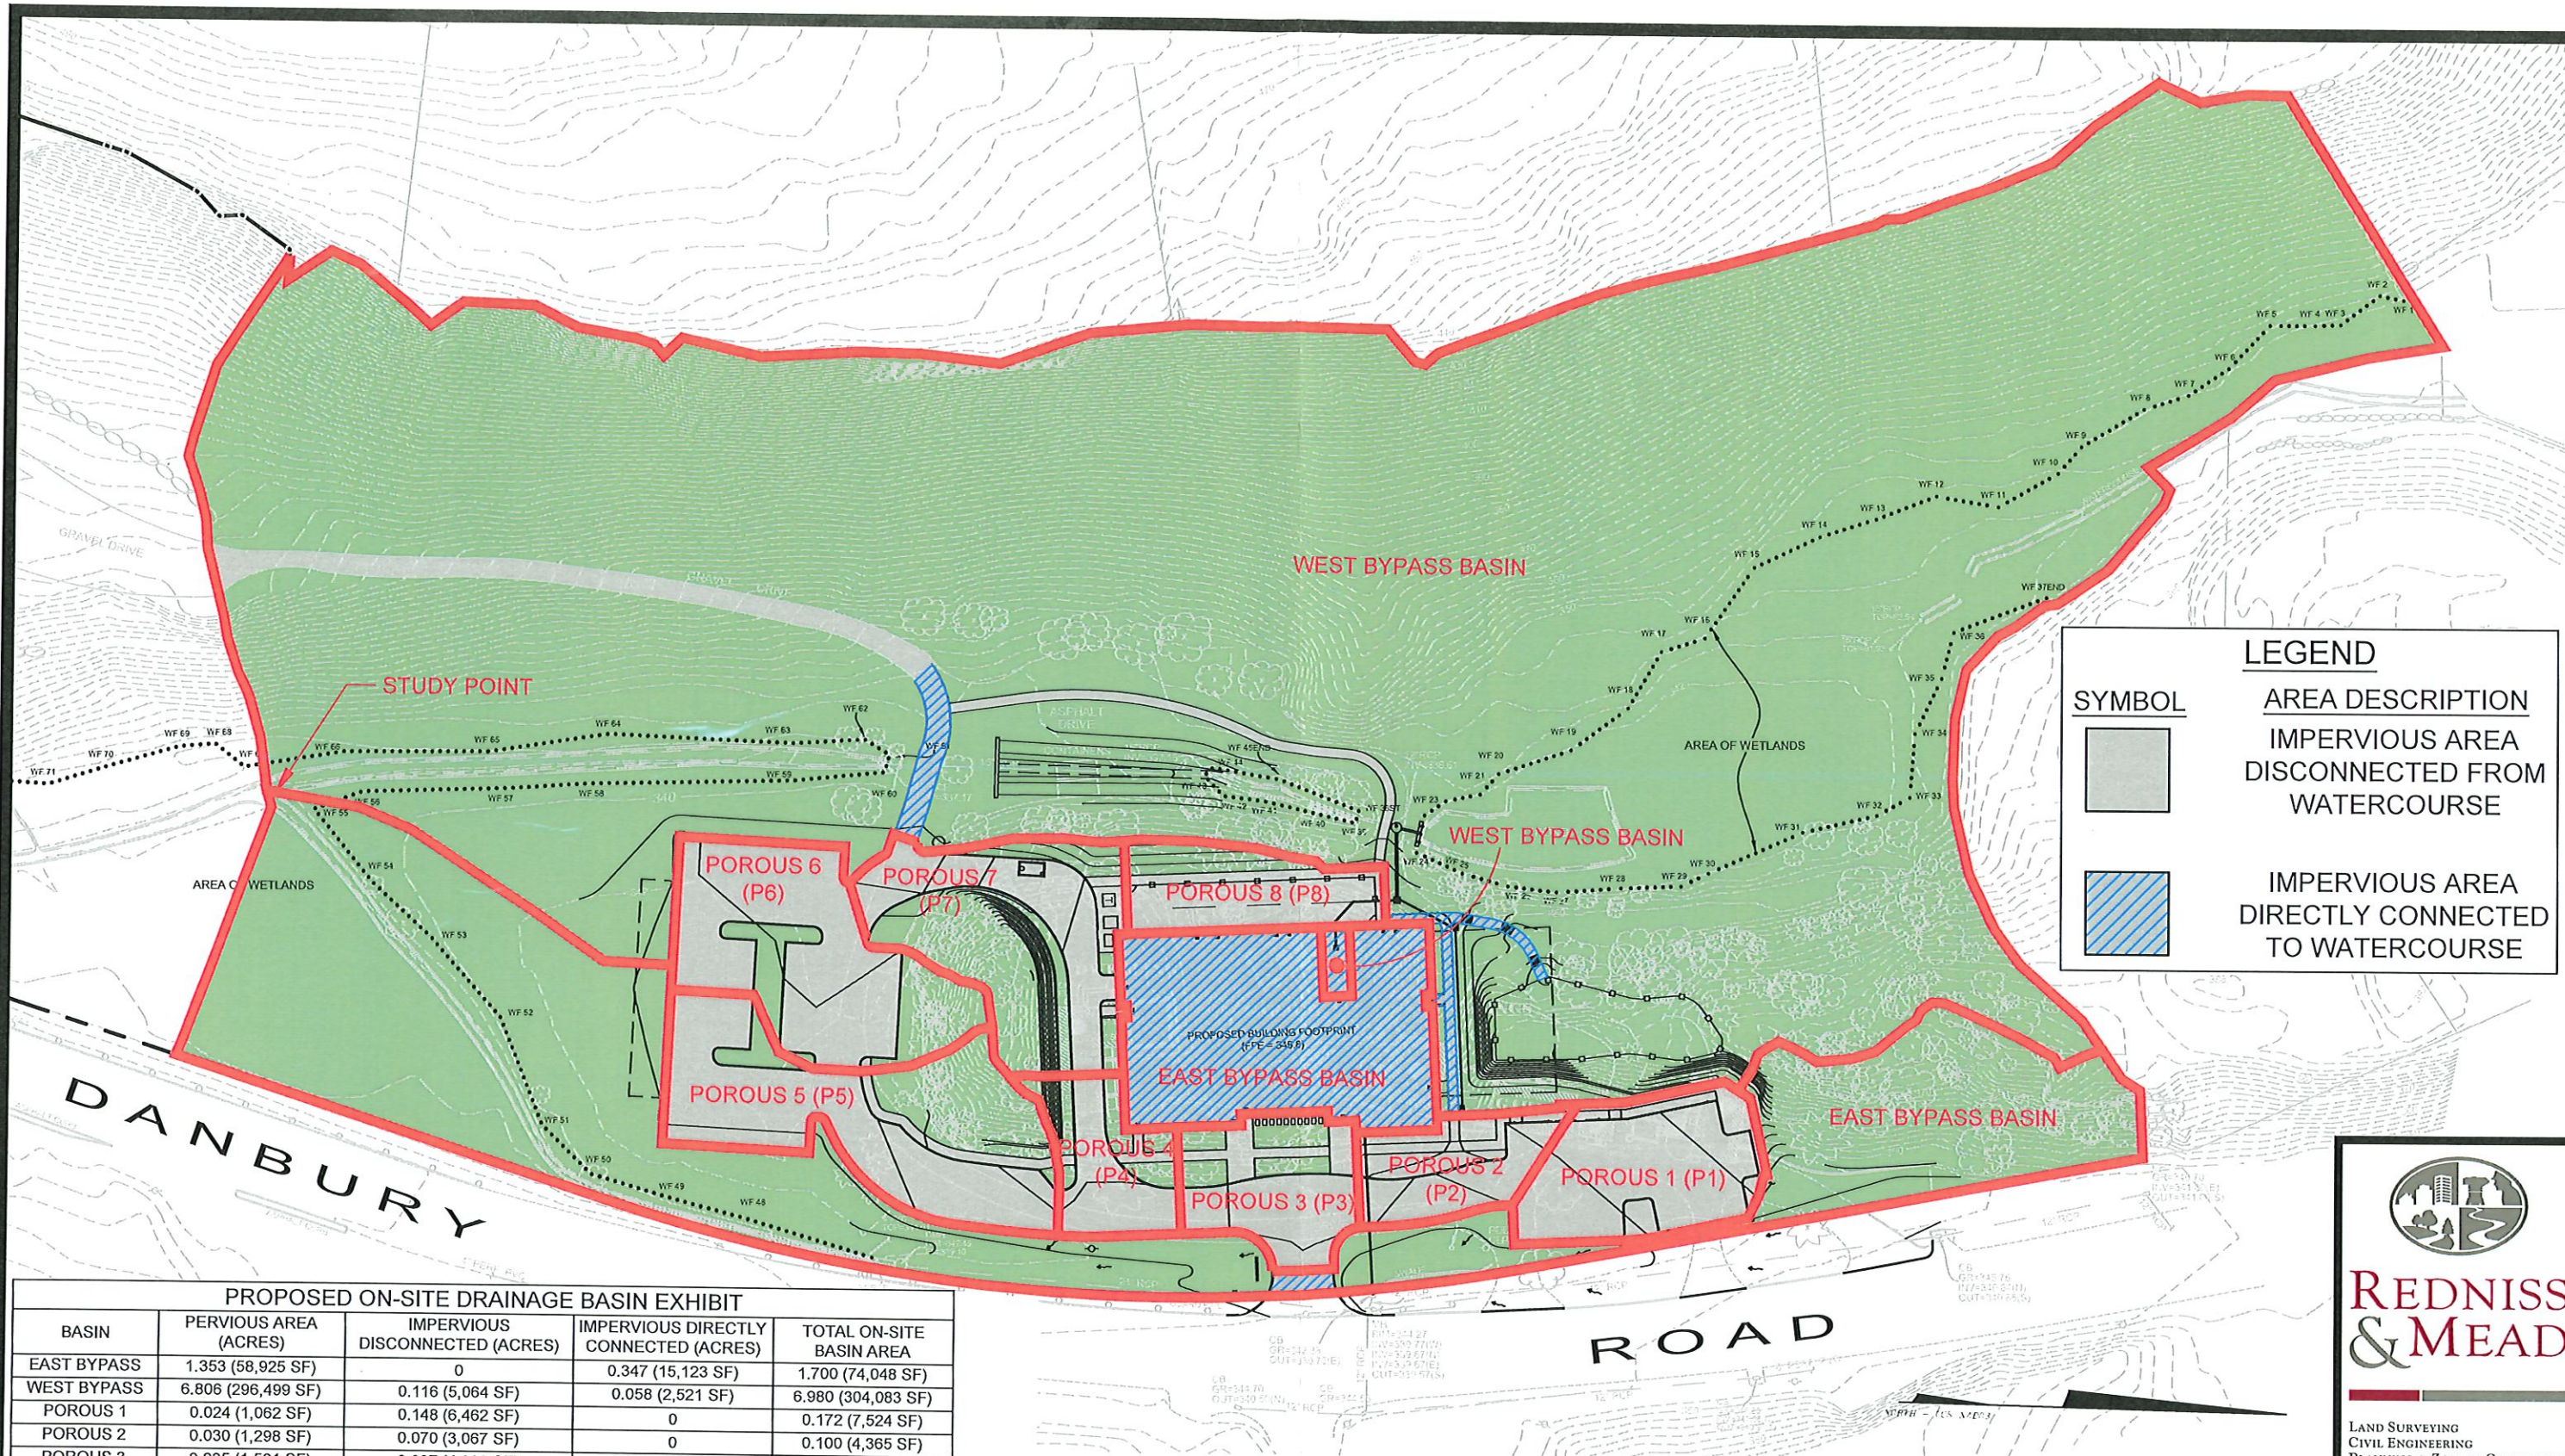

LEGEND

SYMBOL

AREA DESCRIPTION

IMPERVIOUS AREA
DISCONNECTED FROM
WATERCOURSE

IMPERVIOUS AREA
DIRECTLY CONNECTED
TO WATERCOURSE

PROPOSED ON-SITE DRAINAGE BASIN EXHIBIT				
BASIN	PERVIOUS AREA (ACRES)	IMPERVIOUS DISCONNECTED (ACRES)	IMPERVIOUS DIRECTLY CONNECTED (ACRES)	TOTAL ON-SITE BASIN AREA
EAST BYPASS	1.353 (58,925 SF)	0	0.347 (15,123 SF)	1.700 (74,048 SF)
WEST BYPASS	6.806 (296,499 SF)	0.116 (5,064 SF)	0.058 (2,521 SF)	6.980 (304,083 SF)
POROUS 1	0.024 (1,062 SF)	0.148 (6,462 SF)	0	0.172 (7,524 SF)
POROUS 2	0.030 (1,298 SF)	0.070 (3,067 SF)	0	0.100 (4,365 SF)
POROUS 3	0.035 (1,501 SF)	0.097 (4,206 SF)	0	0.132 (5,707 SF)
POROUS 4	0.037 (1,616 SF)	0.064 (2,790 SF)	0	0.101 (4,406 SF)
POROUS 5	0.091 (3,973 SF)	0.210 (9,130 SF)	0	0.301 (13,103 SF)
POROUS 6	0.066 (2,850 SF)	0.195 (8,487 SF)	0	0.261 (11,337 SF)
POROUS 7	0.147 (6,418 SF)	0.114 (4,955 SF)	0	0.261 (11,373 SF)
POROUS 8	0.028 (1,235 SF)	0.086 (3,732 SF)	0	0.113 (4,967 SF)
TOTAL ONSITE	8.617 (375,377 SF)	1.099 (47,893 SF)	0.405 (17,644 SF)	10.121 (440,914 SF)

PROPOSED ON-SITE DRAINAGE BASIN EXHIBIT

863 DANBURY ROAD

WILTON, CT

REDNISS
& MEAD

LAND SURVEYING
CIVIL ENGINEERING
PLANNING & ZONING CONSULTING
PERMITTING


22 First Street | Stamford, CT 06905
Tel: 203.327.0500 | Fax: 203.357.1118
www.rednissmead.com

COMM. NO.:
10258

DATE:
08/16/2021

SCALE:
1"=80'


H:\Jobfiles\211000\10200\10258\dwg\10258 Master Plan - Connected Impervious.dwg 8/31/2021 8:43 AM

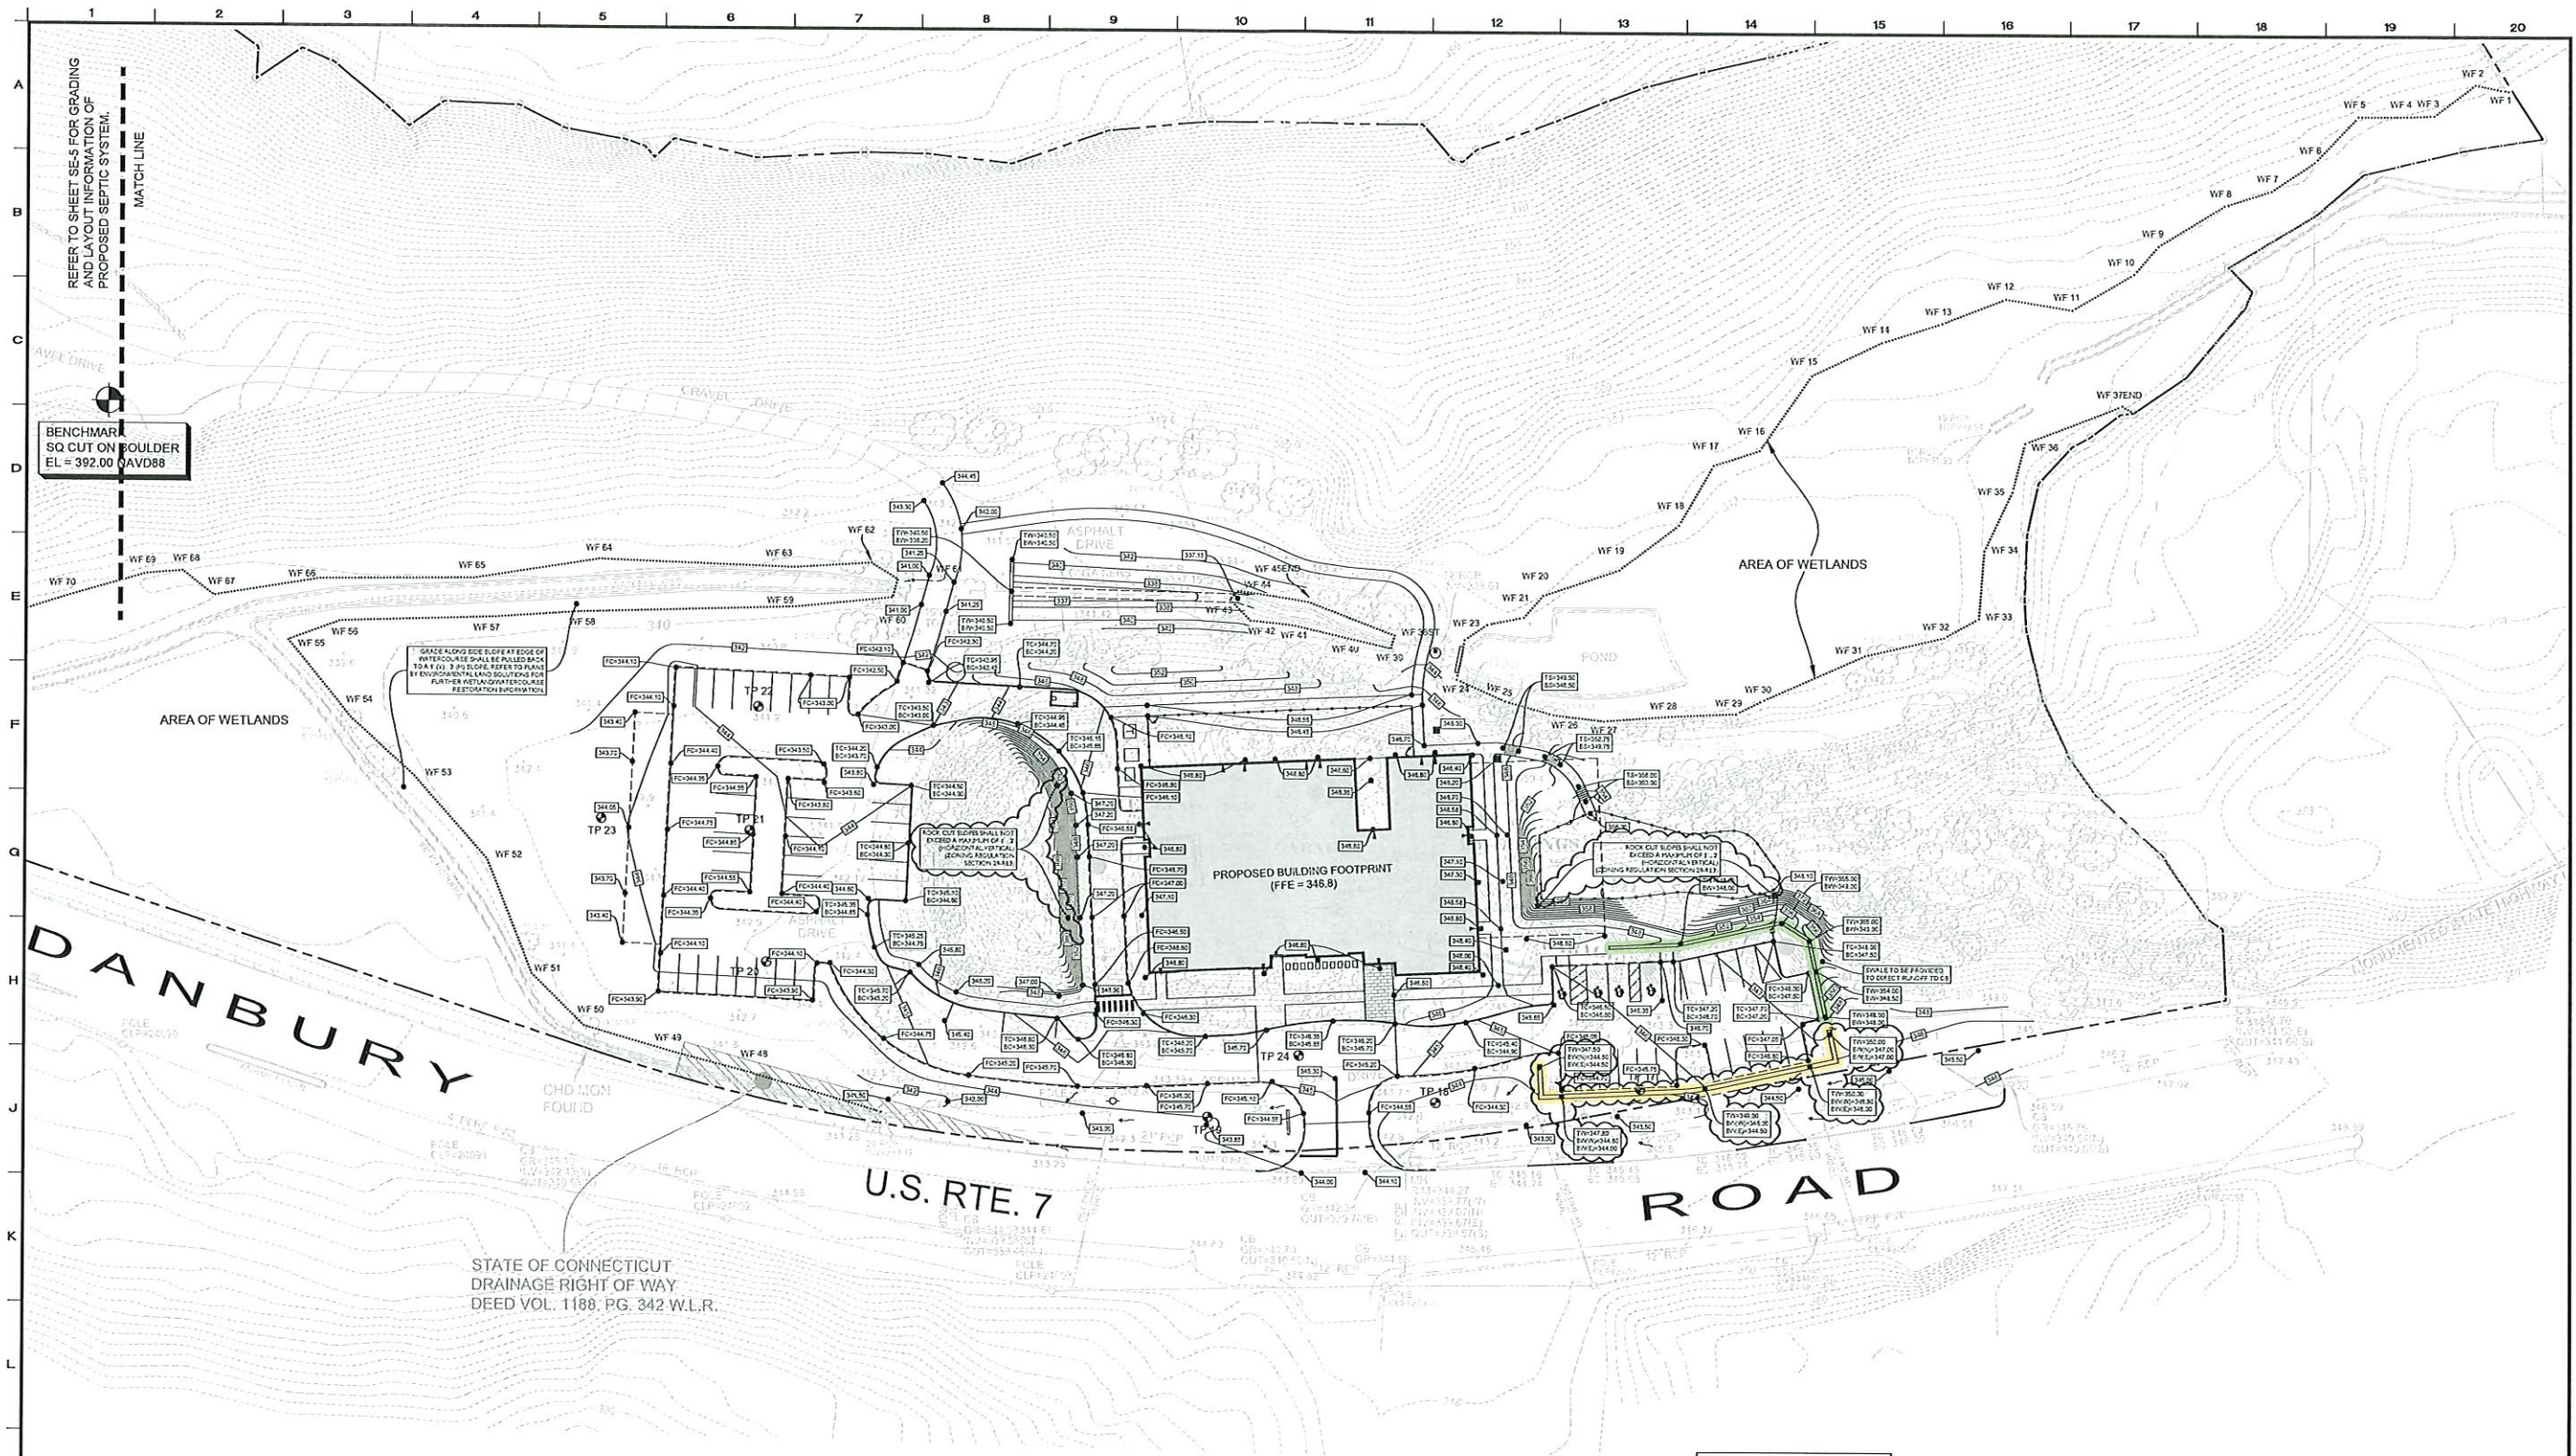

REPRESENTATIVE IMAGE
SEGMENTAL BLOCK RETAINING WALL



REPRESENTATIVE IMAGE
STONE MASONRY

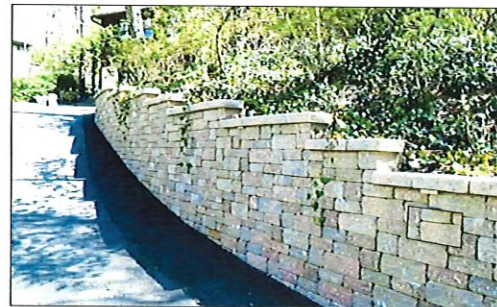

GRADING LEGEND	
SPOT	PROPOSED SPOT GRADE
FLUSH	PROPOSED FLUSH CURB ELEVATION
TAIL	PROPOSED TAIL CURB ELEVATION
WALL	PROPOSED WALL ELEVATION

WALL TYPE LEGEND	
SEGMENTAL BLOCK	LARGE OR SMALL SEGMENTAL BLOCK
STONE MASONRY	STONE MASONRY

2	06/24/2021	REVISED PER P&Z AND HEALTH DEPARTMENT COMMENTS
1	07/01/2021	ORIGINAL SUBMISSION
No.	Date	Revision

SITE GRADING PLAN
DEPICTING
863 DANBURY ROAD
WILTON, CT
PREPARED FOR
CONNECTICUT HUMANE SOCIETY


SCALE: 0 30 60
1"=30'
DRAWN BY: V.H. CHECKED BY: C.J.F.

DATE
August 24, 2021

LAND SURVEYING
CIVIL ENGINEERING
PLANNING & ZONING CONSULTING
PERMITTING

22 First Street | Stamford, CT 06905
TEL: 203.357.6500 | FAX: 203.357.1115
www.rednissmead.com

SE-2

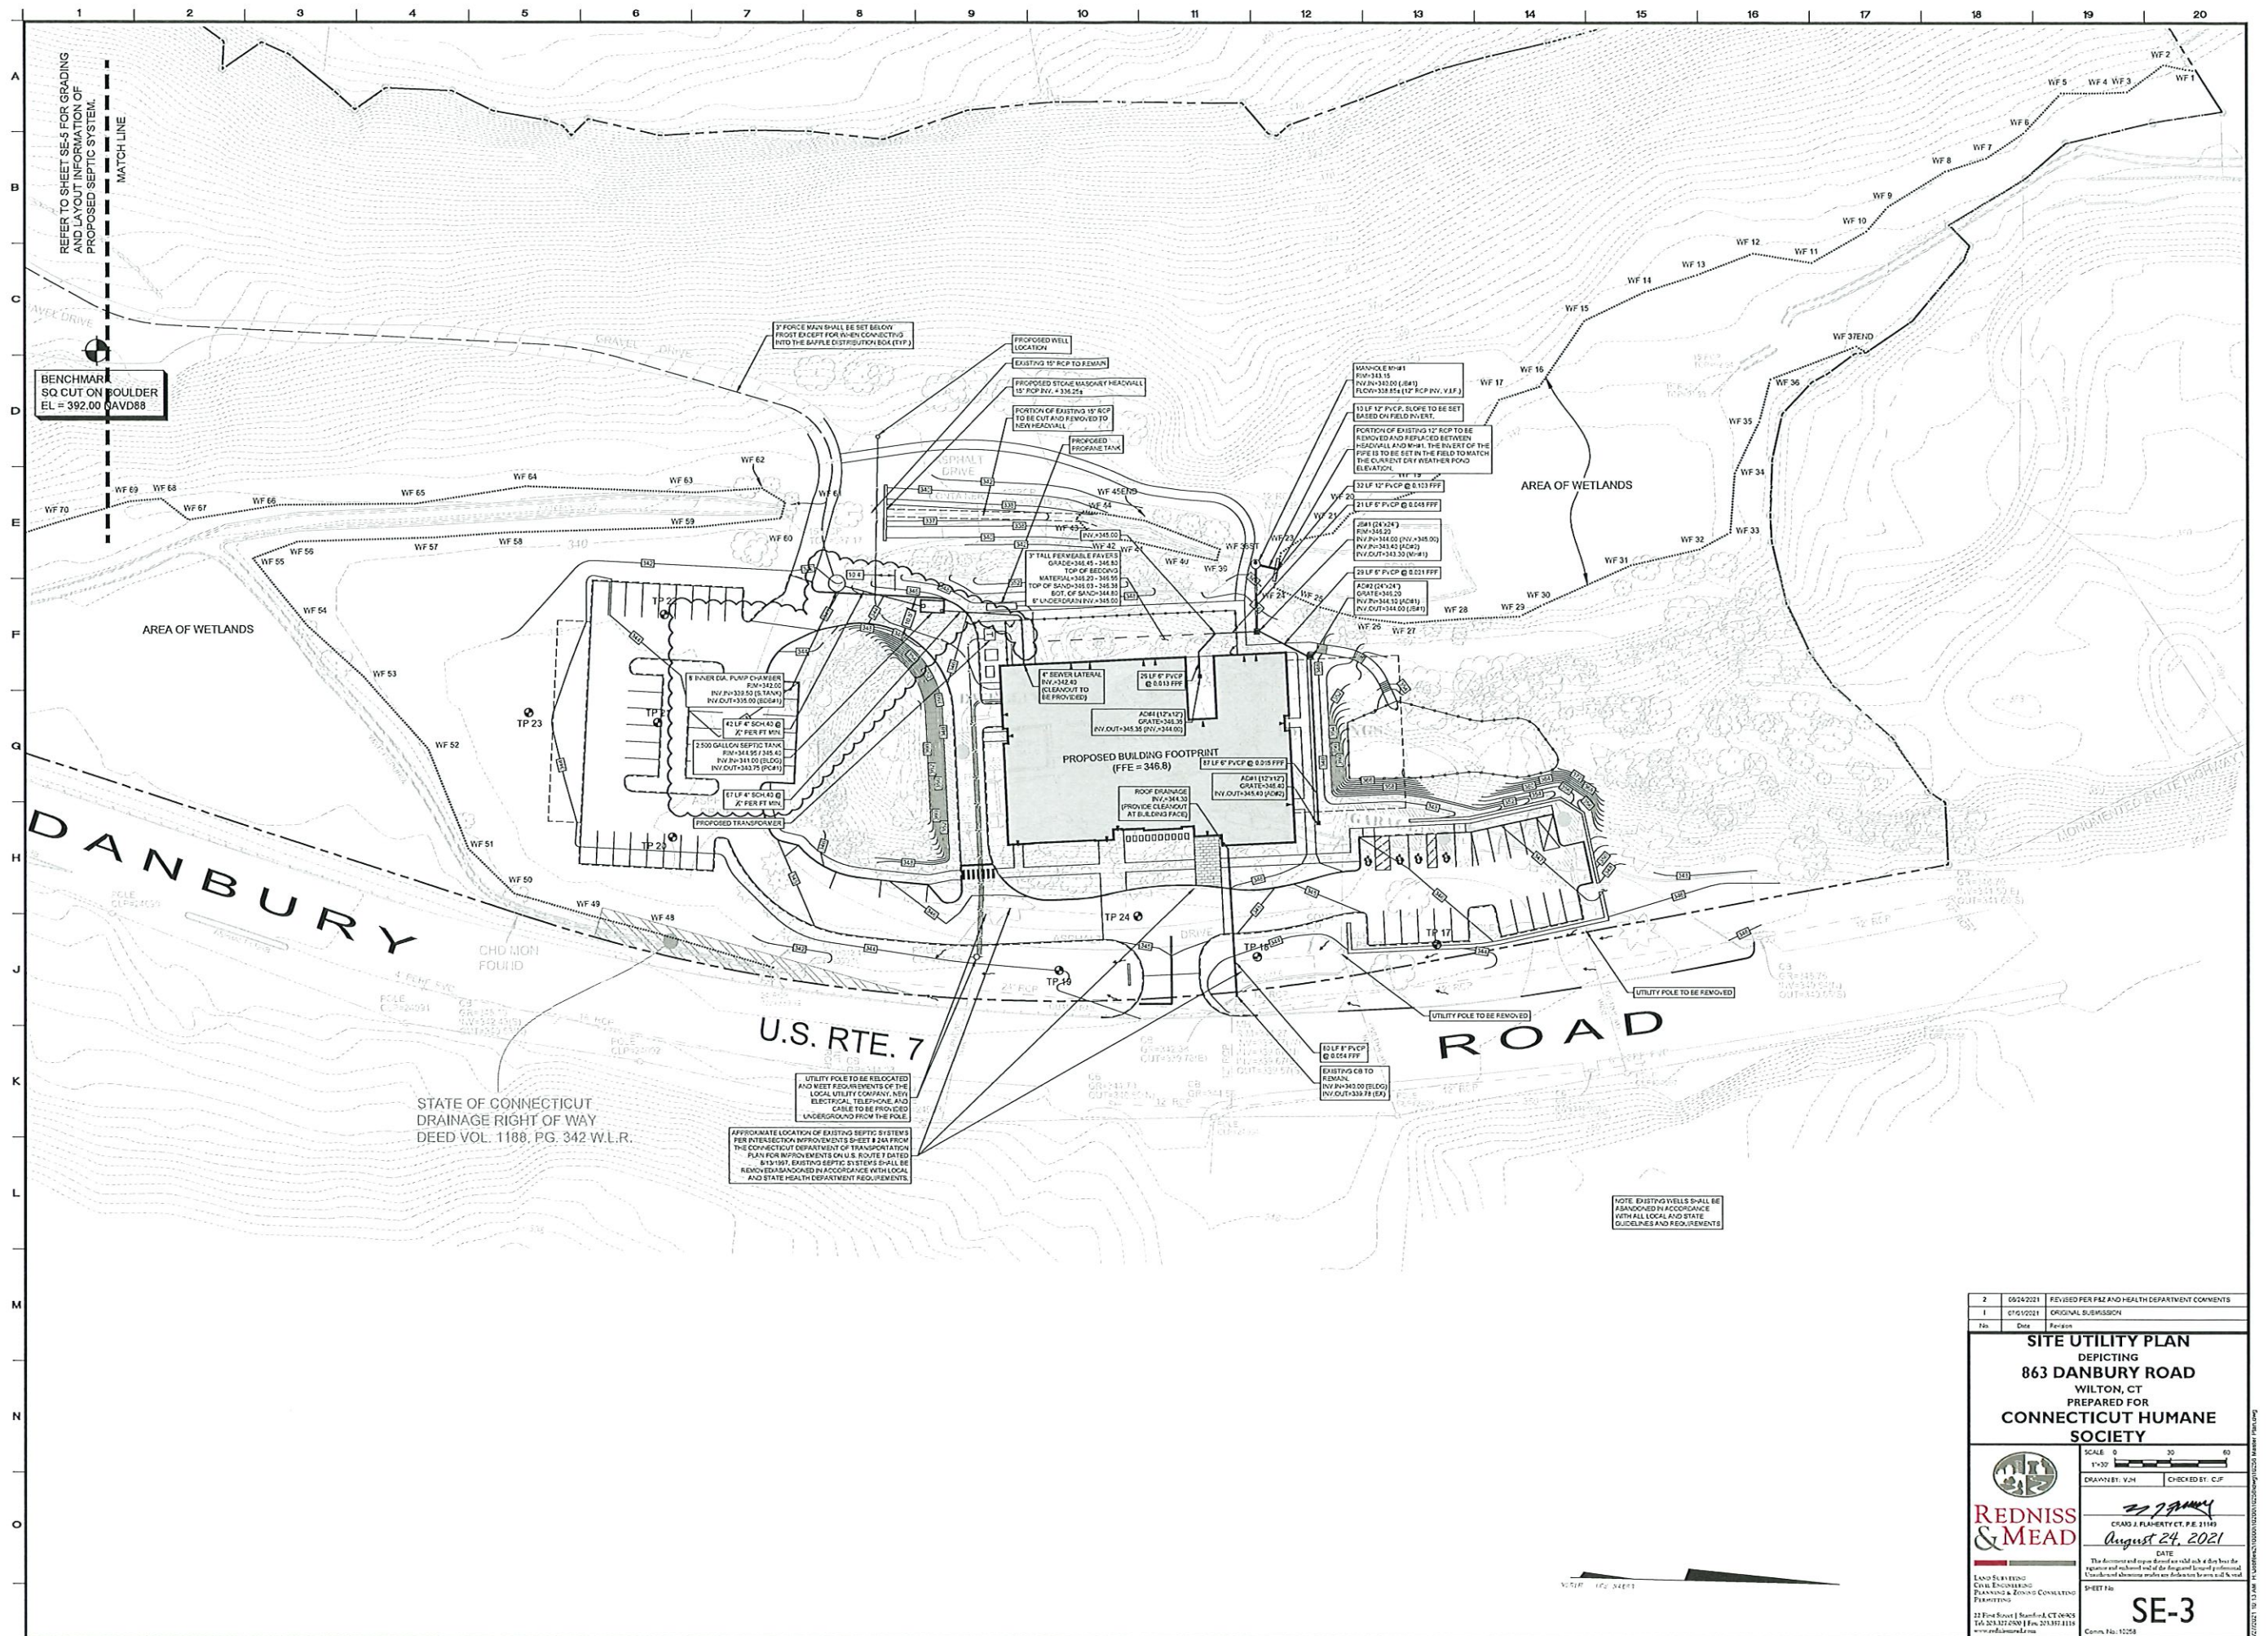

2	06/24/2021	REVISED PER P&Z AND HEALTH DEPARTMENT COMMENTS
1	07/15/2021	ORIGINAL SUBMISSION
No.	Date	Revision

SITE UTILITY PLAN
DEPICTING
863 DANBURY ROAD
WILTON, CT
PREPARED FOR
CONNECTICUT HUMANE SOCIETY

REDNISS & MEAD
LAND SURVEYING
CIVIL ENGINEERING
PLANNING & ZONING CONSULTING
PLANNING

SCALE: 0 30 60
1"=30'

DRAWN BY: VJM CHECKED BY: C/JF

DATE: August 24, 2021
CRAIG J. PLAMERTY, C.E., P.E., S.T.P.

The document and upon it are valid only if they bear the signature and notched seal of the registered engineer, planner, or surveyor who is responsible for its content.

SHEET No. **SE-3**

22 First Street | Stamford, CT 06905
TEL 203.327.2500 | FAX 203.337.8118
www.rednissandmead.com

Conn. No. 12258

2. This document is intended to depict the design of the septic system and is for approval purposes only. Its construction may begin prior to drawing all necessary permits and approvals.
3. All construction shall be in accordance with the most current edition of Connecticut Department of Health Services' Sanitary Code and Specifications for the Town Health Department and all other applicable codes.
4. The septic system has been laid out to collect the discharge from a single discharge water sewer and/or multiple fixtures that have been used.
5. There shall be no leaks with respect to inflow or greater than 150 gpd/day discharge into the septic system.
6. Prior to construction, the Contractor shall consult the Inspector General and the Town of Wallingford Health Department for all applicable codes and regulations that will apply to the septic system. For each job, contractors will be required to perform their own inspection and the inspection will be handled by – on the septic and the Health Department. Once the conditions are met, the permit can be secured.
7. For any inspection, the contractor and/or applicant shall contact "Call Before You Dig" at 1-800-485-4849 for any location not on a underground map.
8. Prior to digging, existing depth of the excavation material shall be above or below the septic system, based on the depth of the excavation prior to any construction.
9. No irrigation shall occur within 15' of the existing or proposed septic system.
10. All drainage pipes within 25' of the septic system shall be designed in accordance with Table D-2 of the Health Department Technical Specifications for Sanitation, Sewer and Septic Systems and equivalent to SCH 40 PVC. All drainage pipes shall be 12" or larger.
11. 75 percent of all solids in $\geq 25'$ of the septic system, 50% of all solids, including bedding, bedding, rock, bark, and the bottom 10% of all solids shall be captured in $\geq 50'$ of the system, or below a "baffle" Solid Classification System with maximum particle size of 1/2". No larger rock or stone. Water may be in the trench below and above a maximum of one foot. No stone larger than 2" shall be $\geq 10'$ of the pipe.
12. Filled pipe shall provide protection cover to all parts of the system. (If minimum) 18" gully may be used for the discharge above. If gully is not placed in a manner as to prevent water pouring on the septic system.
13. Follow the inspection of control system prior to backfilling by the Supervisor, the Health Department or a Professional Engineer, and/or a Licensed Professional Engineer.
14. The Owner shall complete the septic tank records, and have a record kept of every two years depend on accumulation.
15. The contractor shall complete the septic system and the contractor must be approved from a Professional Engineer or Health Department.
16. Select 1/2" x 1/2" and all the equipment of clean and used, free from any foreign material, foreign substances. The material shall meet the following requirements unless approved by the contractor:
 - a. The fill shall not contain any material larger than three (3) inches.
 - b. Use 1/2" x 1/2" of the dry weight of the representative sample may be retained – on the sieve.
 - c. The fill shall be passed and used in the same manner as a dry material.
 - d. The remaining sample must result in the following test results in production area.

16. The responsibility for the preparation of a leaching area utilizing "select material" is that of the licensed installer. The installer shall take the necessary steps to protect the underlying naturally occurring soils from overexcavation and silting once exposed.
17. The select fill percolation rate shall be the same as the design percolation rate or faster and shall percolate slower than 1" in 1 minute.
18. All select fill material must meet the requirements specified in Section VII A of the State of Connecticut.

19. Fill shall be placed on the perimeter of the trench area and spread with a small crawler, tractor or other approved machinery.

22. An "As Built" plan, certified by a Professional Land Surveyor shall be submitted to the Department of Health before a "Permit to Use" is issued.

PIPING:

23. All pipes shall be grouted securely into the structure walls.

24. Sewer pipe from the building to the manhole tank to be extra heavy 4" C.I.P. ASTM A74 with rubber gasket joints or Schedule 40 P.V.C. pipe with solvent-weld joints. Other gravity pipe to be P.V.C. ASTM SGR 35 D3034 with rubber gasket joints or equal. No bends shall exceed 45° and all bends must be flange.
25. All pipe shall be laid on 4" of compacted sand. Vertical backfill shall be sand up to 12" above the top of the pipe. Backfill above the sand shall be clean fill compacted in 4" lifts with no stones larger than 12".
26. All piping and plumbing work associated with the pumping system shall be performed by a plumber licensed in the State of Connecticut. All electrical work shall be performed by an electrician licensed in the State of

27. The force main shall be 3" Schedule 40 pressure pipe with solvent cement joints or 3" polyethylene pipe. 125' approved and shall be in accordance with ASTM 1239 and manufacturer's recommended procedure.

SEPTIC TANK DISTRIBUTION BOXES:

30. The septic tank shall have two chambers inlet and outlet baffles, gas deflector and outlet filter and shall be able to withstand H202 loading refer to detail. Septic tank shall be 2500 gallon septic tank.
31. Distribution boxes shall be precast concrete. Distribution boxes shall be raised within 12" of finished grade and be watertight. Raise lids with brick, mortar and automatic around the structure to comply with the

32. The contractor shall submit shop drawings of all products to Inspiring Engineer for review and approval prior to actual installation. Allow 5 working days for shop drawing review.

33. The septic tanks, pump chambers and distribution boxes shall be set even on a minimum of 6" compacted bedding of sand, gravel or crushed stone.

34. The septic tank shall be a watertight tank. Leak testing should be performed utilizing either a vacuum test or a pressure test. In addition, the contractor shall submit a watertightness test report.

PUMP CHAPTER:

35. The contractor shall submit an owners manual for the pump to the owner at the end of construction.

36. Effluent pump to be Goulds Model 3855 WE1532HH or acceptable equivalent. Pump shall be 1 1/2 HP or greater with a pump rate of 30 GPH at 19' TDH to the distribution box. Pump off to pump on draw down range of 1" - 4" which discharges 250 gallons per cycle. Pump shall be ordered with power cord long enough to reach the electrical junction box.

29. The pumping system shall comply with all applicable codes and requirements and be installed in accordance with the manufacturer's recommendations.

30. Pump shall be equipped with a control panel and high water alarm (audio & light, Model ST 230 by CTS Controls or equivalent approved by the engineer and shall be located in the primary building near the float box.

31. All electrical work shall be done by a licensed electrician. Alarm and pump to be installed on separate.

43. Underground electric conduits shall be installed in accordance with Town of Wilson requirements to contain electrical supply and alarm cables.

PREPARATION OF THE PRIMARY LEACHING AREAS:

42. Prior to placement of leaching facilities look for existing drainage pipes. If such pipes are encountered, contact the design engineer for inspection/redesigns.
43. Prior to placement of leaching facilities remove all trees, grass, topsoil, vegetation, leaves & litter, shrubs, stumps, rocks larger than 24", roots within 5' of the system or under fill footprint. Voids made by stump and rock removal shall be filled with select fill material.

45. Non-silica dust may be like soils and/or gravel mixture classified as SP, SW, SP, GP, GH, Hs per the Unified Soil Classification System. It shall have not more than 4% fines passing the #100 sieve, not more than 8% passing the #200 sieve, and no stones larger than 19". Non-silica dust shall not be mechanically compacted but allowed to settle naturally over 3 to 6 month period.

Total Projected Flow = 0.1 GPD / SF x 14,243 SF = 1,424 GPD
Design Flow = 1,424 GPD / 1.5 (F.S.) = 2,136 GPD

Percolation Rate = 1" in 100 min.

Percolation Factor (PF) = 1.0

Depth to Restrictive Layer = $5'4" (TP\#7) + 5'4" (TP\#8) / 2 + 3'4" (TP\#9) / 2 = 41.5'$

Hydraulic Gradient = $(410.30 - 410.02) / 25 = 25\%$

Hydraulic Factor (HF) = 16.0

Flow Factor = $2,136 / 300 = 7.12$

MLSS Required = $120 \times HF \times FF$
 $1.0 \times 16 \times 7.12 = 113.9 \text{ LF}$

MLSS Provided = 120 LF

Leaching Area Required = Design Flow / Sewage Application Rate
 $2,136 \text{ GPD} / 1.5 = 1,424 \text{ SF}$
 Leaching Area Provided = $120 \text{ LF} \times 13.0 \text{ SF/LF (CTL-24)} = 1,560 \text{ SF}$
 Septic Tank Size = 2,500 gallons
 Pump Chamber Storage Provided = 2,161 gallons (8' Inner Diameter Pump Chamber)

(R1 & 2) Restriive Septic System:



Total Design Flow = 2,136 GPD
Percolation Rate = 1" in 10.0 min.
Percolation Factor (PF) = 1.0
Depth to Restrictive Layer = $(37'(TP\#10) + 47'(TP\#11) + 41'(TP\#16)) / 3 + 44'$ (TP#1)
Hydraulic Gradient = > 15%

Hydraulic Factor (HF) = 14.0
Flow Factor = 7.12
MLSS Required = $1.0 \times 14 \times 7.12 = 99.7$ LF
Leaching Area Required = Design Flow / Sewage Application Rate
 $2,136 \text{ GPD} / 1.5 = 1,424$ SF
Leaching Area Provided = $120 \text{ LF} \times 13.0 \text{ SF/LF (CTL-24)} = 1,560$ SF
* REFER TO SHEET SE-5 FOR SEPTIC DETAILS

[illegible]


Month	Temperature (°F)
January	35
February	38
March	40
April	42
May	44
June	46
July	45
August	43
September	40
October	38
November	36
December	35

* MINIMUM ELEVATION IF RESERVE SYSTEM WERE TO BE INSTALLED. RESERVE IS NOT PROPOSED AT THIS TIME.

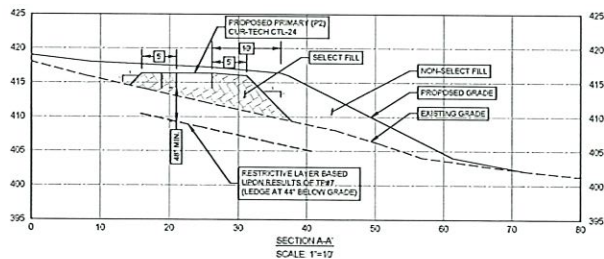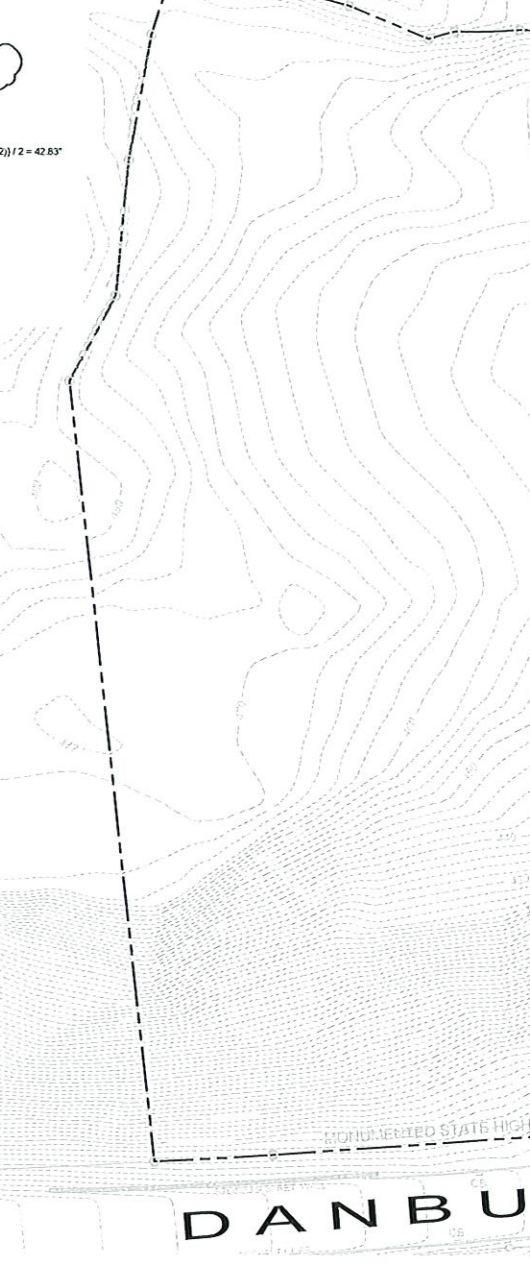


NOTE
THIS CROSS-SECTION IS A SPECIFIC SECTION
(A-A) THROUGH THE PROPOSED LEACHING
FACILITIES. IT SHOULD NOT BE CONSIDERED AS
AN "AVERAGE" SECTION ACROSS THE ENTIRE
SYSTEM FOR USE IN DETERMINING REQUIRED
AMOUNTS OF FILL. IT IS THE RESPONSIBILITY OF
THE INSTALLER TO DETERMINE THE REQUIRED
AMOUNTS OF FILL.

NOTE:
THE JOINTS OF THE PIPE SHALL BE A MINIMUM OF 10' FROM THE POINT OF CROSSING. THE SANITARY SEWER SHALL BE CLASS 150 PRESSURE PIPE. THE STORM DRAIN SHALL BE LOCK-JOINT PRESSURE PIPE.




REQUIREMENTS AS STATED ABOVE WILL APPLY WHEN HORIZONTAL SEPARATION BETWEEN THE STORM & SANITARY LINES ARE LESS THAN 10' AND VERTICAL SEPARATION IS LESS THAN 10'.


CROSSINGS OF SANITARY PIPES AND STORM PIPES
N.T.S.



BAFFLE DISTRIBUTION B-BOX DETAIL
N.T.S.

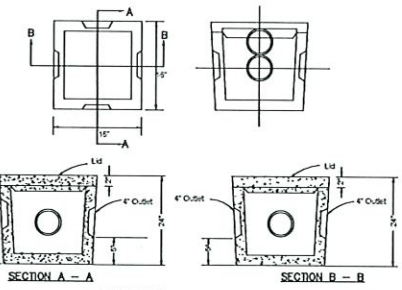


HIGH OVERFLOW DISTRIBUTION BOX DETAIL
N.T.S.

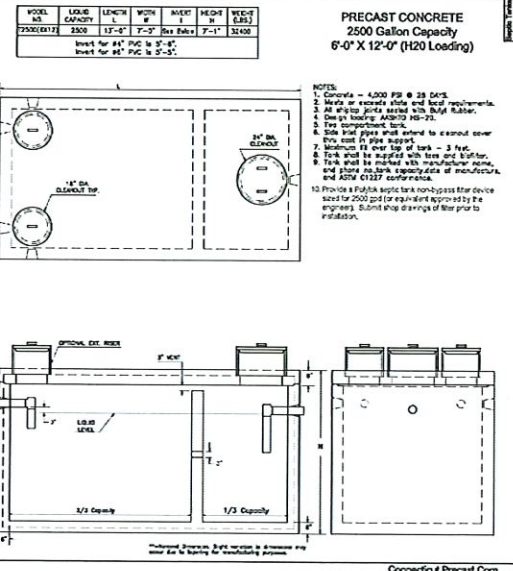

2,500 GALLON SEPTIC TANK
N.T.S.


- GENERAL:
- All piping and plumbing work shall be performed by a plumber licensed in the State of Connecticut. All electrical work shall be performed by an electrician licensed in the State of Connecticut.
 - The Owner, the Health Department and the Design Engineer shall be notified three days prior to the commencement of each phase of construction.
 - All work shall be done in accordance with CSHA requirements. The contractor shall be responsible for compliance with CSHA requirements.
 - The contractor shall submit shop drawings of all products and equipment to the Design Engineer for review and approval prior to installation, ordering and installation.
 - Under no circumstances shall trench water be allowed to drain off through sewer lines.
 - Upon the completion of the work, the contractor will be required by a Registered Professional Engineer to the satisfaction of the State of Connecticut that construction is in accordance with the approved plans.
 - The forced main shall be 3" PVC pipe (SDR35) in accordance with ASTM D3034 standards.
 - The forced main shall be installed so that it may be at least 48" below finished grade. It shall be connected to the existing forced main in accordance with the Connecticut Plumbing Code and the requirements of the City of Stamford.
 - Install thrust blocks at all horizontal and vertical bends of the forced main in accordance with the detail.
 - The new forced main and gravity sewer shall be pressure and leakage tested in accordance with ASTM standards.
 - The Design Engineer and Health Department shall be informed of the testing schedule three days in advance so that they can witness the testing as may be required. The contractor shall provide all equipment and materials needed to perform the test. Should the forced main or gravity sewer fail to pass the test, the contractor shall determine the cause of the failure, remedy the condition and retest the pipe in question in the presence of the Design Engineer and the Health Department.
 - The pumping system shall comply with all applicable codes and requirements and be installed in accordance with the manufacturer's recommendations.
 - The equipment described on these plans has been selected because it meets the project requirements. Should the contractor wish to use substitute equipment, the substitution must be approved by the Owner or his representative prior to ordering the equipment.
 - Alarm switch and pumps to be installed on separate circuits.
 - Station shall be located and adjusted in the field by the supplier with written reports supplied to owner.
 - Prior to acceptance, the pumping station shall be tested by the Owner's representative. All mechanical and electrical systems must operate in accordance with the plans. Operation and maintenance manuals for all equipment must be provided to the owner.
 - The pumping system, including emergency power supply shall have a one year warranty.
 - A representative of the pump manufacturer shall be present at the start up of the pump station.
 - Water lines must be 10 feet minimum away from sewer lines horizontally or shall be 18" minimum above and 18" minimum below. If water line and sewer line intersect, sewer line to be installed in concrete 3 feet on either side of where lines intersect.
 - 4" sewer pipe to be SDR-35 PVC.
 - Bedding material to be based on 34" stone.
 - 4 foot minimum cover for pressure lines at time of inspection.

PUMP CHAMBER & STORAGE TANK DETAILS & NOTES
N.T.S.

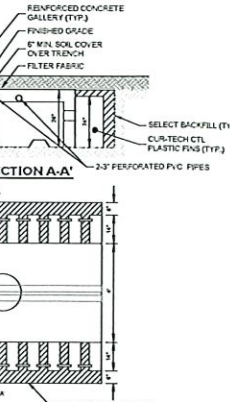


CUR-TECH CTL-24 GALLERY SYSTEM
N.T.S.

WET WELL SHALL BE PRECAST CONCRETE STRUCTURE 5' DIA. TO WITHSTAND H-20 TRAFFIC LOADINGS. WALL THICKNESSES SHOWN ARE MINIMUMS ONLY AND SHALL BE INCREASED AS NECESSARY FOR STRUCTURAL PURPOSES.

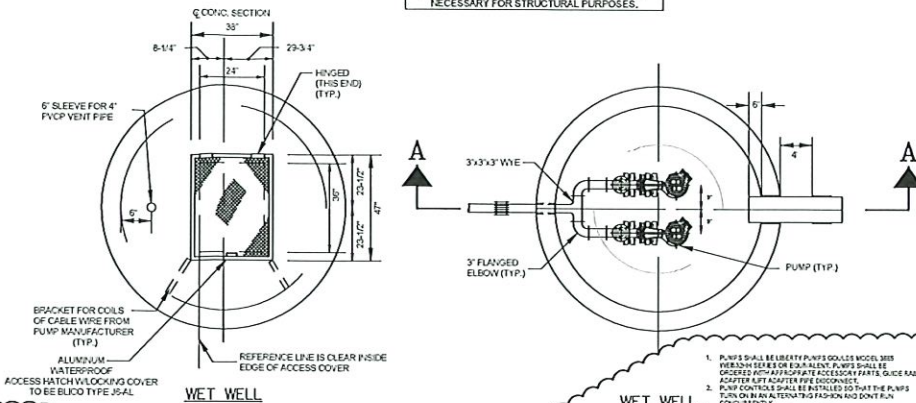


WET WELL PLAN
N.T.S.

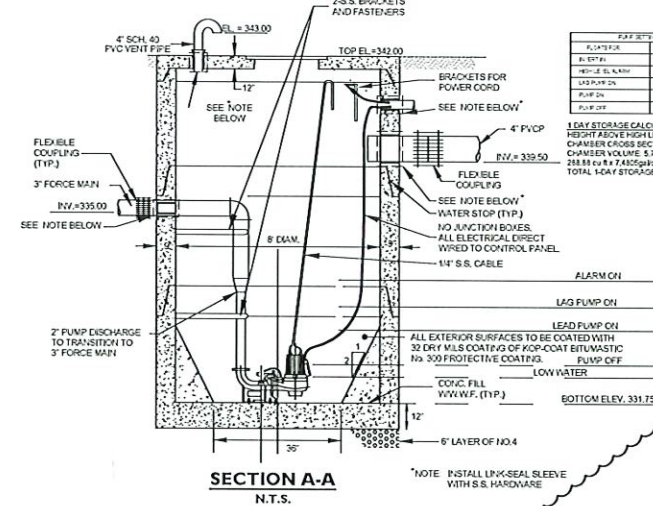


SECTION A-A
N.T.S.

PUMP CHAMBER & STORAGE TANK DETAILS & NOTES
N.T.S.





SEPTIC FORCE MAIN DETAIL
N.T.S.

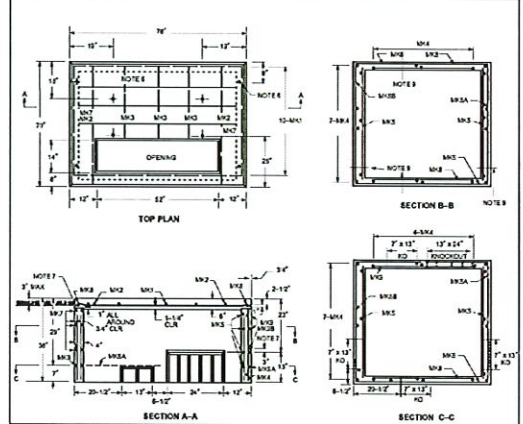

THREE-PHASE TRANSFORMER PAD
(PRECAST CONCRETE - 76" x 70" x 36")
N.T.S.

CONCRETE BANK DIMENSIONS

CONCRETE BANK DIMENSIONS	CONCRETE BANK DIMENSIONS	CONCRETE BANK DIMENSIONS
CONCRETE BANK DIMENSIONS	CONCRETE BANK DIMENSIONS	CONCRETE BANK DIMENSIONS
CONCRETE BANK DIMENSIONS	CONCRETE BANK DIMENSIONS	CONCRETE BANK DIMENSIONS
CONCRETE BANK DIMENSIONS	CONCRETE BANK DIMENSIONS	CONCRETE BANK DIMENSIONS



CONDUIT BANK CONSTRUCTION
N.T.S.

2 09/24/2021 REVISED PER PAZ AND HEALTH DEPARTMENT COMMENTS
1 07/10/2021 ORIGINAL SUBMISSION

No. Date Revision

DETAILS
DEPICTING
863 DANBURY ROAD
WILTON, CT
PREPARED FOR
CONNECTICUT HUMANE
SOCIETY

SCALE: N.T.S.
DRAWN BY: J.M. CHECKED BY: C.F.

REDNISS & MEAD
LAND SURVEYING
ENGINEERING
PLANNING & ZONING CONSULTING
PERMITTING

22 First Street | Stamford, CT 06905
TEL: 203.377.2500 | FAX: 203.377.2115
www.rednissandmead.com

DATE: August 24, 2021
CHASS & PLANNING CT, P.E. 31195
August 24, 2021

SE-8
SHEET No. 10258